

Resin Grip™

Protective Non-slip Flooring System




 REAL WORLD
epoxies

1300 EPOXIES | info@realworlddepoxies.com | www.realworlddepoxies.com

Resin Grip™ is a high-performance commercial floor finish specially designed to seal, protect and offer lasting slip resistance in workshops, food processing facilities and wet areas.

Available in all Australian Standard colours, the completely seamless resin flooring system can be applied in all conditions, and is resistant to wear, chemicals and impact.

Most importantly, Resin Grip™ has no strong smell and contains no solvents or flammables, so it can be installed safely without risk or disruption to your workers or business.

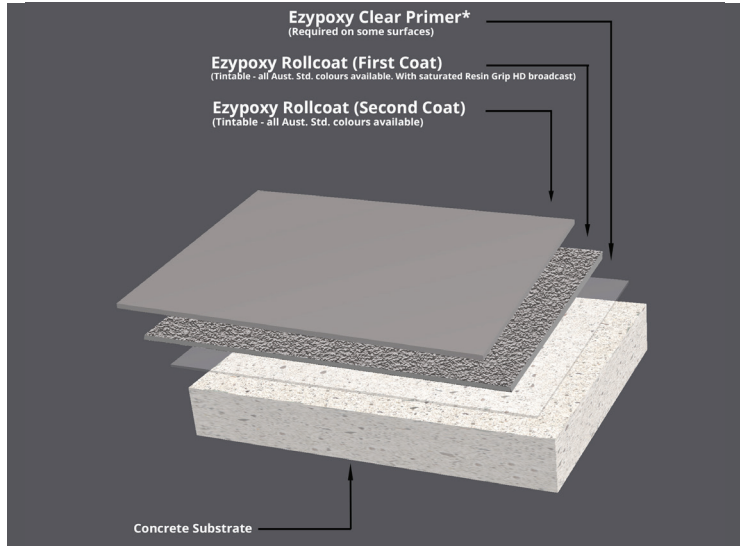

Why you'll love Resin Grip™:

✓ SAFER

Resin Grip™ is completely solvent free. No strong smell, disruption or risk to your business!

✓ MORE DURABLE

Resin Grip™ uses a full layer of aluminium oxide particle to provide the most durable slip-resistant finish possible. On the scale of hardness, only diamond is harder!

✓ MORE HYGIENIC

Fully sealed with no seams, gaps or joins, and the ability to withstand the harshest commercial cleaners, makes it much easier to keep mould and mildew at bay.

✓ LESS DOWNTIME

With no solvents, strong odours or flammables to contend with, and the ability to be applied in all conditions, Resin Grip™ is a great choice for minimising downtime.

✓ EXTRA OPTIONS


Extra chemical resistance and impact resistance options are available. A finer particle can also be used to reduce the non-slip profile and make it easier to clean.



Ideal for:

✓ Workshops ✓ Food Processing ✓ Cafes/Restaurants/Bakeries ✓ Wet Areas

Installation - how it works

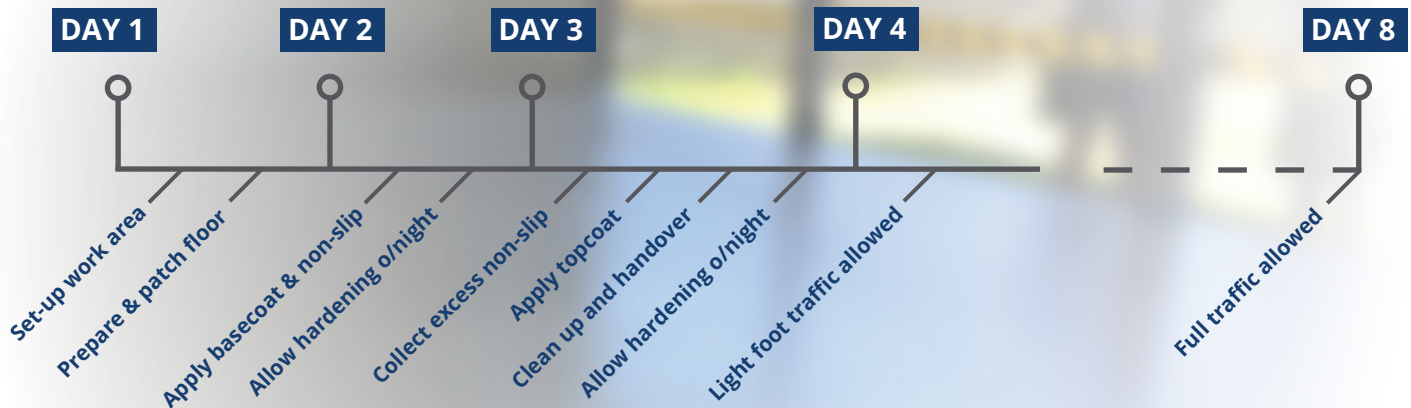

Note - The installation process shown is typical for the standard Resin Grip™ system on concrete floors less than 150m². Removal of existing floors, surface damage/contamination, installation of coving or falls-to-drains, application of a primer coat, and/or larger areas will generally require more time.

Getting ready for your new floor

- 1. Plan to be floorless** - a standard Resin Grip™ floor will take a few days and you'll need to stay off the floor the entire time. Keep protective measures in place for the duration and don't try to get back on it earlier than instructed.
- 2. Clear the floor** - remove all items from the floor before the starting date so the flooring technician can get straight to work. If there are heavy items that can't be moved, let them know beforehand.
- 3. Ensure easy access** - make sure the flooring technician can get in and out of the work area and has access to power. If there are any restrictions in this regard, once again it's a good idea to let them know beforehand.
- 4. Seal off** - footprints, bugs and dust don't go well with freshly laid floors. Close all windows, turn off lights and block doorways. If the floor is one part of a larger project, it's best to leave it to last to reduce the risk of other trades damaging it.
- 5. Make yourself available** - checking in with your flooring technician every now and again will make sure everyone stays on the same page and the project progresses as smoothly as possible.



Resin Grip™ Colour Chart



Neutral Grey (N23)



Light Grey (N35)




Pipeline Grey (N43)




Bridge Grey (N44)



Koala Grey (N45)

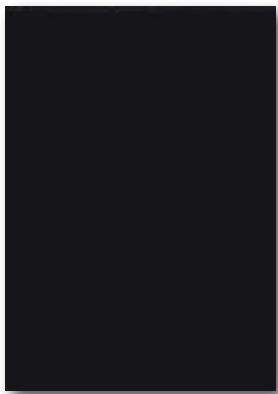

Black*

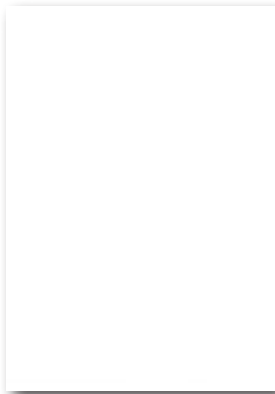

White (N14)



Manilla (Y45)




Merino (Y56)



Mushroom (Y65)



Sunflower (Y15)

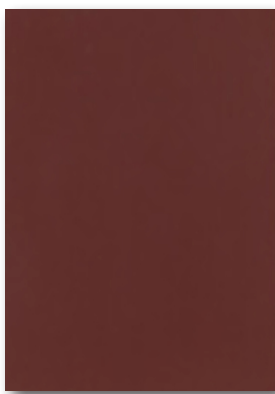


Red Oxide (R63)



Signal Red (R13)



Shamrock (G23)

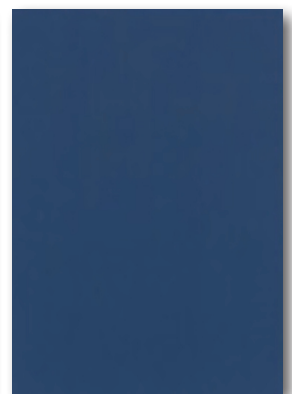

Sapphire Blue (B14)

* Non-Australian Standard colour

- Colours shown on chart are indicative only. Actual colours may differ slightly.

- All Australian Standard colours available upon request. Contact Real World Epoxies for more information.